

SPRING CLAMP PRINTED CIRCUIT TERMINAL



Production Code : 311 VBKD



Spring clamp terminals are available in 5,08x7,62 pin range and allow for practical use with spring cable fastening system. It is designed to cater for as many poles as desired with its adjustable modular (pin) system.

TECHNICAL DATA

DIMENSIONS

| | |
|-------------------|--------------|
| Width | 58,48 mm |
| Height | 13,15 mm |
| Depth | 13,60 mm |
| Pin range | 5,08x7,62 mm |
| Pin thickness | 0,5x1 mm |
| Pin hole diameter | 1,25 mm |

TECHNICAL DATA

| | |
|---------------------|----------------------------|
| Current | 10 A |
| Voltage | 250 V |
| Cable cross section | 0,25 – 1,5 mm ² |
| Screw size | M3 |
| Nominal torque | 0,25 Nm |
| Flammability rating | V0 |
| Coating of metals | μ3+AG |

GENERAL ORDERING DATA


| | |
|-------------------|---|
| Type | Spring Clamp Printed Circuit Terminal – Pin 11 |
| Qty | 50 pcs |
| Order no | 31.480 – 34.480 |
| Package weight | 0,7 kg |
| Packaging | Box |
| Min. Order Qty | 50 pcs |
| Country of origin | TURKEY |

* Stock color is grey.

CERTIFICATES

| | |
|-----------------------|---------------|
| CERTIFICATE | ISSUED BY |
| TS 10487 EN 60998-2-1 | TSE |
| CE | SZUTEST CO. |
| RoHS | İNTERTEK A.Ş. |
| EAC | SERCONS |

DRAWINGS

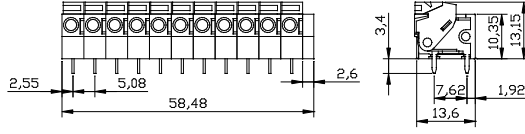

Diagram

